


Rev.	Amendments	Date	Made By	Chk'd By

NOTES

1. Standard carriageway construction with raised dome being built up in layers of binder course to receive the surface course
2. All signs to be illuminated in accordance with a street lighting design to be agreed with RCTCBC Street Lighting engineer.
3. Maximum upstand at the centre of the island to be 125mm.
4. Roadmarkings are to comply with the current TSRGD.
5. Central island to be painted with white thermoplastic material.
6. Additional speed reducing features may also be required such as raised crossing points.


- Diag. 1003.3
- - - - - Diag. 1004
- ⊙ Diag. 1003.4
- ▣ Pedestrian Crossing
- ◀ Traffic sign diagram 611.1

For locations of traffic signs and road markings refer to the Traffic Signs Manual Chapter 5

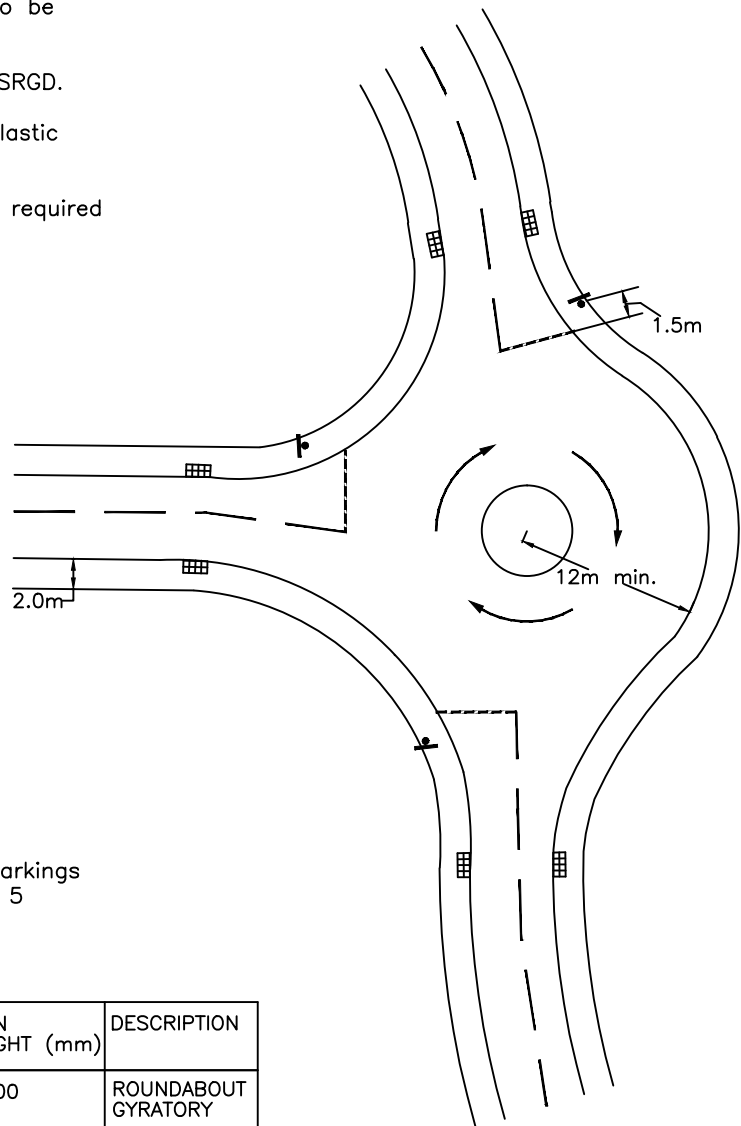

ROAD SIGN SCHEDULE

REFERENCE No.	DIAGRAM No.	INFORMATION PLATE	SIGN HEIGHT (mm)	DESCRIPTION
5	611.1	NONE	600	ROUNABOUT GYRATORY

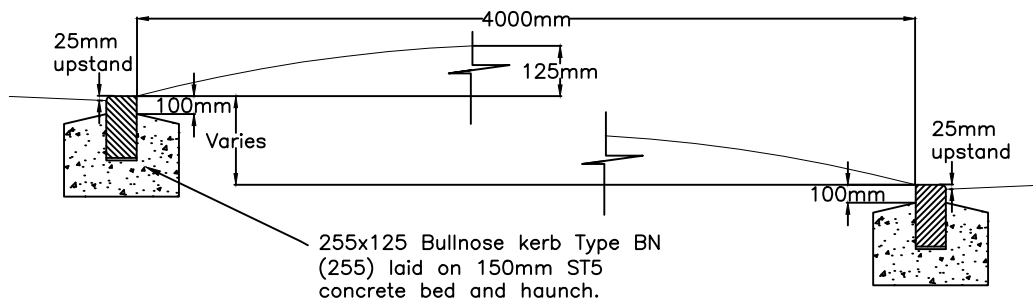

MINI ROUNDABOUT

HIGHWAY DESIGN GUIDE STANDARD DETAILS

**RHONDDA CYNON TAF
COUNTY BOROUGH COUNCIL**



Drawn	DA
Checked	SZ
Date	Apr '11
Scale	NTS
Drg. No.	190
Rev.	