


Rev.	Amendments	Date	Made By	Chk'd By

//////  
PREFERRED VERTICAL CLEARANCE 3.7M

-----  
MIN VERTICAL CLEARANCE 3.0M



SHARED CYCLE / FOOTPATH WITH SEPARATE BRIDLEPATH

**NOTES**


Refer to Sustrans Technical Information Note No 28 'Horses on the National Cycle Network', for additional information.

**Key Information**

1. Dynamic Width of Cyclist 1m.
2. Dynamic Width Horse & Rider 1.5m.
3. Max Width Mobility Scooter 0.85m.
4. Min Width for horserider to pass cyclist 3m.
5. a) Preferred Vertical Clearance 3.7m  
b) Minimum Vertical Clearance 3.0m.
6. Height of Bridge parapets to be 1.8m
7. Where barriers are provided to exclude motorcycles suitable gated access must be provided for horses.
8. Consideration should also be given to the provision of:-
  - i) Mounting Blocks.
  - ii) Bridle Gates / Access Controls.
  - iii) Road Crossing facilities.

//////  
PREFERRED VERTICAL CLEARANCE 3.7M

-----  
MIN VERTICAL CLEARANCE 3.0M

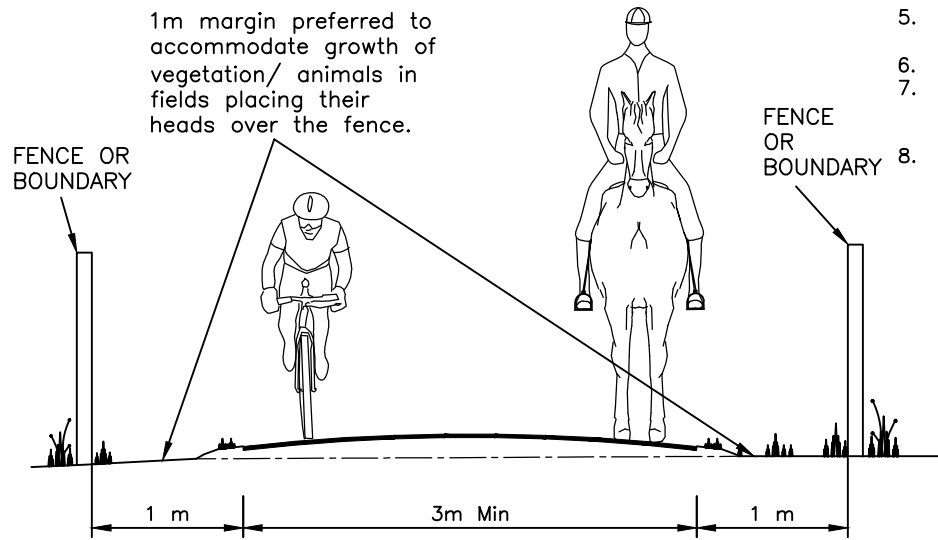

SHARED CYCLE TRACK / FOOTPATH AND BRIDLEPATH

SHARED CYCLE TRACK FOOTPATH AND BRIDLEWAY ARRANGEMENT

HIGHWAY DESIGN GUIDE STANDARD DETAILS

RHONDDA CYNON TAF  
COUNTY BOROUGH COUNCIL



Drawn	AR
Checked	SZ
Date	Oct '12
Scale	NTS
Drg. No.	193
Rev.	