
| Rev. | Amendments | Date | Made By | Chk'd By |
|------|------------|------|------------|-------------|
| | | | | |
| | | | | |

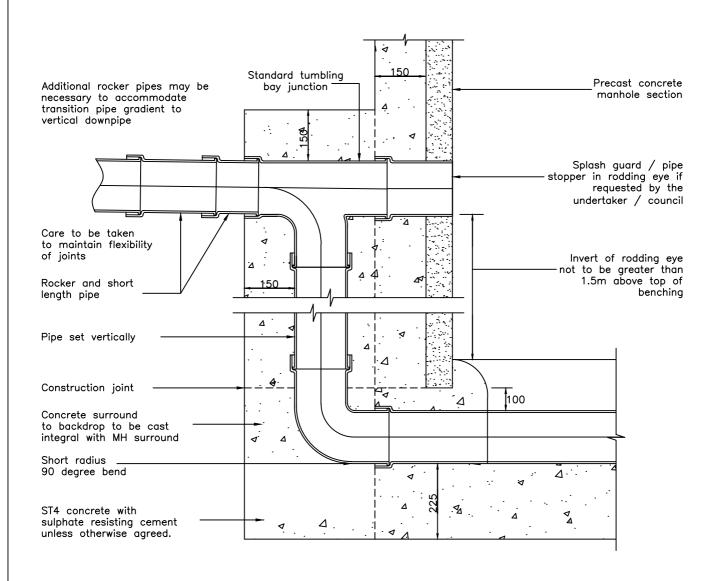

NOTES

- 1. Where the drop is not excessive a 45 degree drop pipe may be used.
- 2. Steeper gradients are preferred to the use of backdrops.
- 3. All dimensions are in millimetres unless otherwise stated.

VERTICAL BACKDROP

HIGHWAY DESIGN GUIDE STANDARD DETAILS

RHONDDA CYNON TAF COUNTY BOROUGH COUNCIL



| Drawn | DA | | |
|----------|---------|--|--|
| Checked | SZ | | |
| Date | Apr '11 | | |
| Scale | NTS | | |
| Drg. No. | 206 | | |
| Day | | | |