


Rev.	Amendments	Date	Made By	Chk'd By

For all locations use double triangular cover and frame to BS EN 124, D400 Kitemarked with a minimum clear opening of 675mm. Cover and frame to be bedded on mortar.

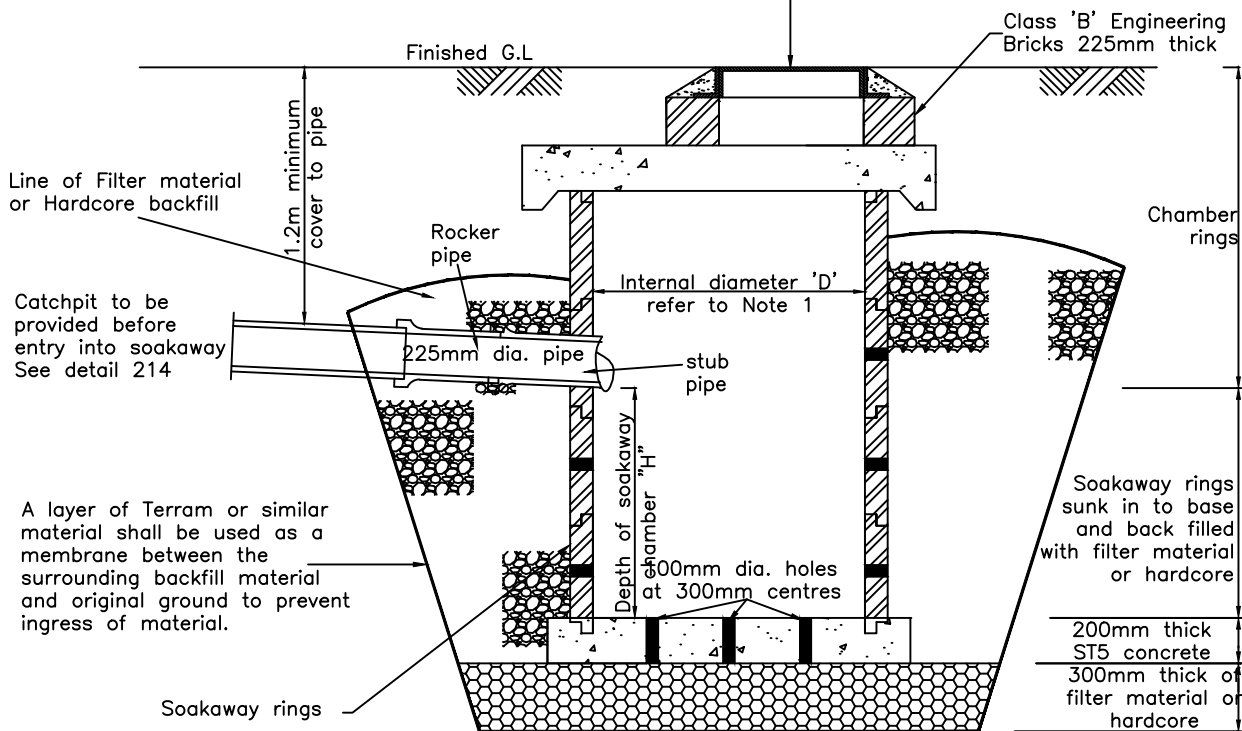

TYPICAL SOAKAWAY

**NOTES**

1. Soakaway rings come in diameters of 900mm, 1050mm, 1200mm, 1350mm, 1500mm, 1800mm, 2100mm, 2400mm, 2700mm and 3000mm.
2. The storage depth 'H' and internal diameter 'D' will depend on the design of the soakaway.
3. The cover and frame for catch pit and soakaway shall be double triangular to BS EN 124, D400, Kitemarked with minimum clear opening of 675mm.
4. Soakaways require additional maintenance as therefore require a commuted sum payment for future maintenance. (Please refer to Section D of the RCT Design Guide for further information).
5. Access for a maintenance vehicle must be provided.

SOAKAWAY

HIGHWAY DESIGN GUIDE STANDARD DETAILS

RHONDDA CYNON TAF  
COUNTY BOROUGH COUNCIL



Drawn	DA
Checked	SZ
Date	Apr '11
Scale	NTS
Drg. No.	215
Rev.	