


Rev.	Amendments	Date	Made By	Chk'd By

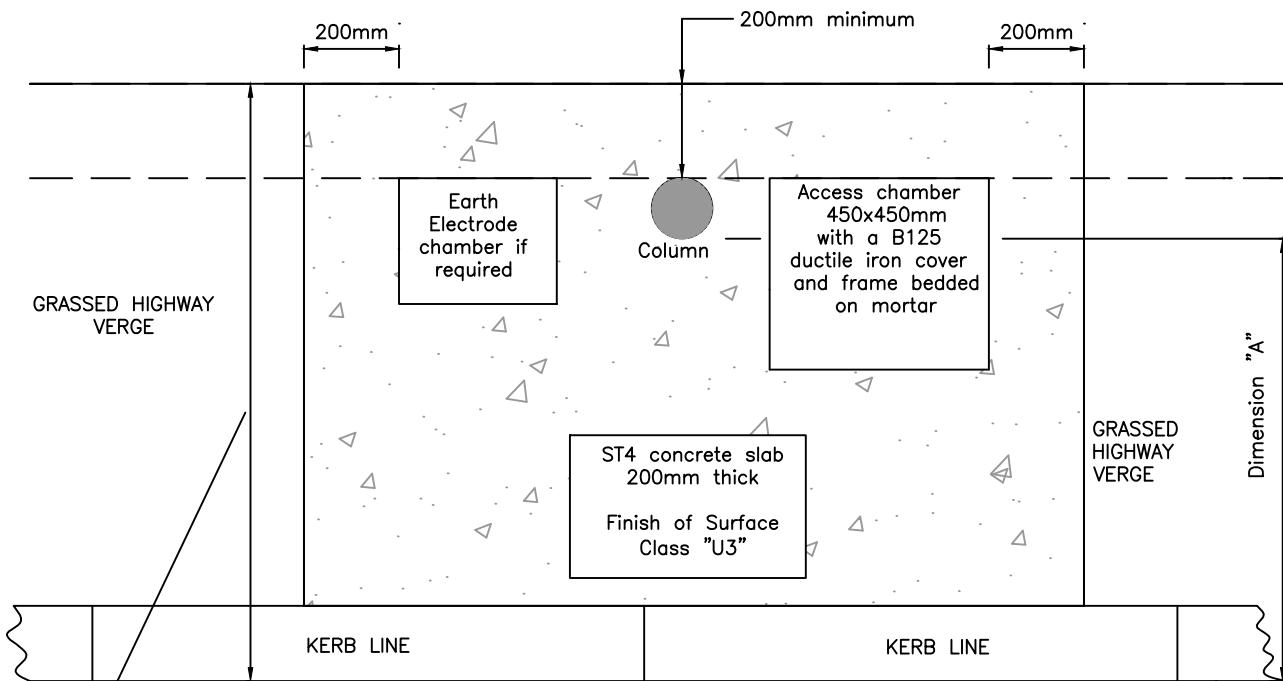

Overall length of concrete slab dependent on location of apparatus

CARRIAGEWAY

Design Speed km/h	Minimum Horizontal Clearance (Dimension "A") m
50	0.80
80	1.00
100	1.50
120	1.50

NOTES

1. The set back of the column in the verge is subject to the design speed of the carriageway. Please refer to adjacent table for details.
2. Concrete slab to be extended a minimum of 200mm behind the back of the street lighting column.

STREET LIGHTING COLUMN, ACCESS CHAMBER AND EARTH ELECTRODE IN HIGHWAY VERGE

HIGHWAY DESIGN GUIDE STANDARD DETAILS

**RHONDDA CYNON TAF
COUNTY BOROUGH COUNCIL**



Drawn	CLF
Checked	RMD
Date	Jan 14
Scale	NTS
Drg. No.	322
Rev.	